



BF μ -Series Paper Filter

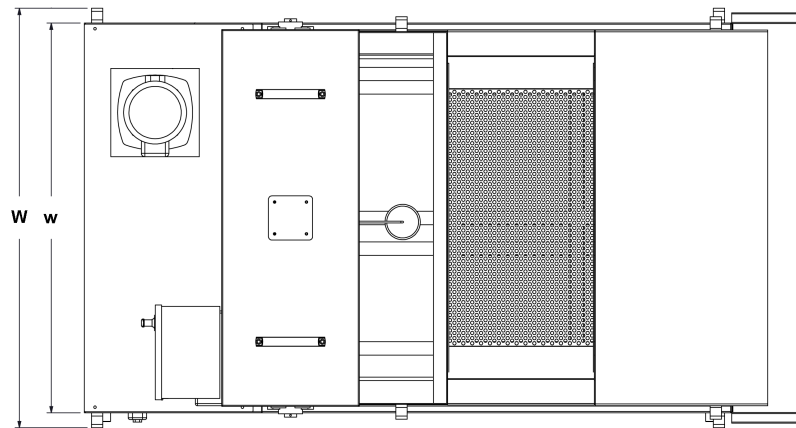

Top View

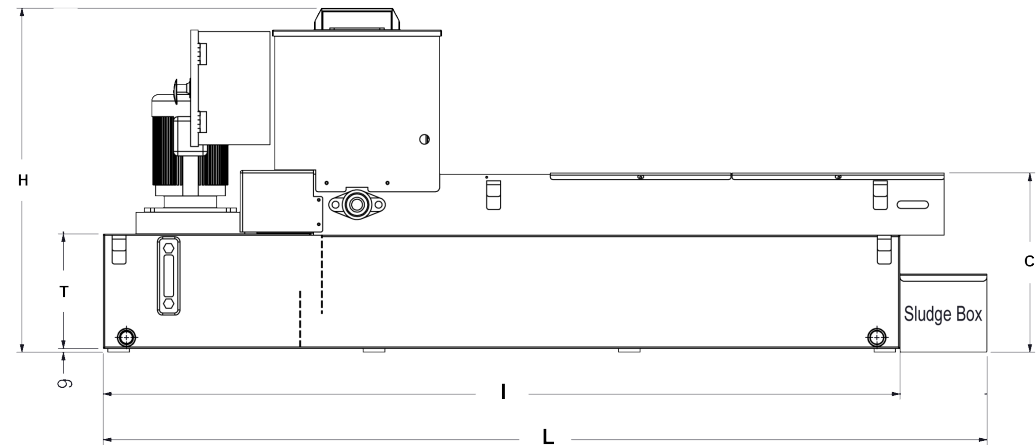

Side View

BF μ -Series Paper Filter with auto paper feed, supply pump, coolant tank, and one roll of filter paper.

Standard Electrics: 3 x 230/460v, 60Hz (Other specification built to order)

Unit / mm

Model	Flow Rate gpm / lpm	Tank Capacity gallons / liters	L	x	W	x	H	C	I	T	SP-Series Pump	Drive Motor	Paper Roll 30-micron
BFμ-5	5 / 20	44 / 168	1284		724		775	400	1004	263	1/8-hp	25W	
BFμ-10	10 / 40	51 / 194	1434		724		765	400	1154	263	1/8-hp	25W	20" x 100-yards
BFμ-15	16 / 60	57 / 219	1584		724		765	400	1304	263	1/8-hp	25W	
BFμ-20	21 / 80	64 / 244	1734		724		765	400	1454	263	1/4-hp	25W	
BFμ-30	32 / 120	89 / 337	1729		924		795	400	1529	263	1/2-hp	40W	27" x 100-yards
BFμ-40	42 / 160	106 / 404	2029		924		795	400	1829	263	1/2-hp	40W	
BFμ-60	63 / 240	140 / 530	2031		1186		791	412	1831	263	1-hp	60W	40" x 100-yards
BFμ-95	95 / 360	185 / 704	2631		1186		791	412	2431	263	1-hp	60W	

Filter media rolls are readily available in 50, 30 and 15 micron filterability.

Flow rates are based on water soluble coolant using 30-micron media. For cutting oils it is recommended to use one or two greater capacity.